


# Hosa Technology: CMK-000AU Series Microphone Cable



Specifications	
Series	CMK-000AU
Conductors	20 AWG x 2 OFC
Conductor Strands	26/0.16 mm
Insulation 1	1.5 mm Ø PE
Insulation 2	1.8 mm Ø Conductive PVC
Shield	95% OFC Braided
Jacket	6.8 mm Ø PVC
Connectors	Neutrik XLR3F to Neutrik XLR3M

Characteristics	
Conductor Resistance	0.0387, 0.0387 ohms/m at 20° C
Capacitance	
Conductor to Conductor	109.53 pF/m at 1 kHz
Conductor to Braid	243.87, 242.38 pF/m at 1 kHz
Inductance	
Conductor to Conductor	0.6089 uH/m at 1 kHz
Conductor to Braid	0.2156, 0.2245 uH/m at 1 kHz

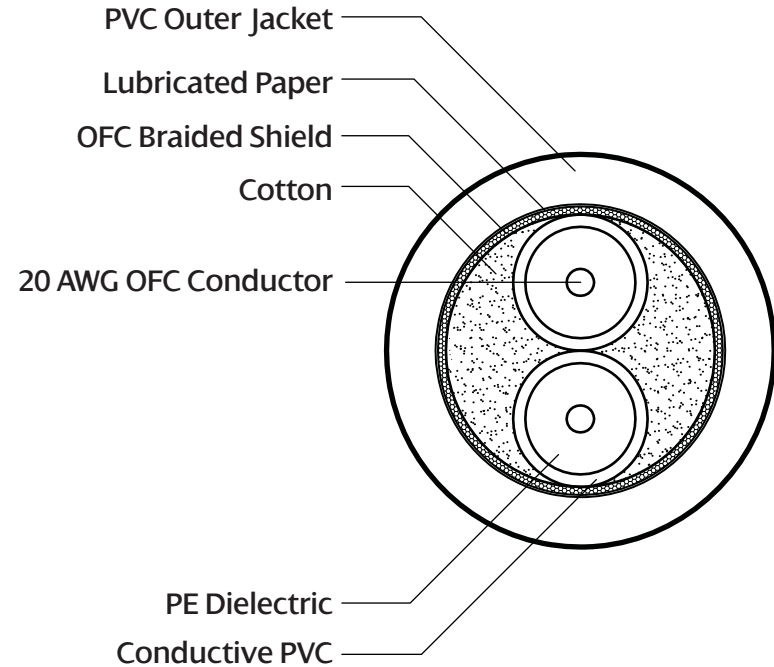