
DTM-800 SERIES


Balanced Snake, DB25 to 8 x XLR3M


Available in the following lengths: 3m(9.9 ft.), 4m(13.2 ft.), 5m(16.5 ft.), 7m(23.1 ft.).



Pinout Diagram

NOTE: this view is from the "INSIDE" of the Multi-pin (D-Sub) connector. It depicts the view as seen from the solder terminals. The MALE pins are on the other side. This is essentially a "Mirror" view.

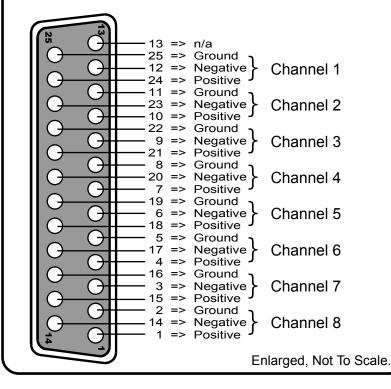

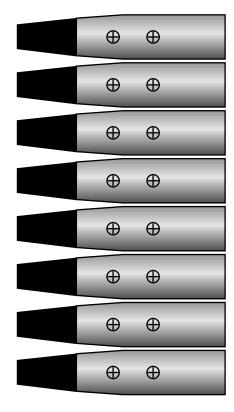

XLR PIN 1 = Ground XLR PIN 2 = Positive XLR PIN 3 = Negative

25-pin male plug (also called a "D-Sub") wired-out to 8 XLR Male connectors, for output connections to balanced XLR inputs on audio mixers inputs on audio mixers.



HOSA TECHNOLOGY , 6650 CABALLERO BLVD., BUENA PARK, CA 90620 PHONE: 714.522.8878 FAX: 714.522.4540