


Edge Microphone Cable

CMK-000AU

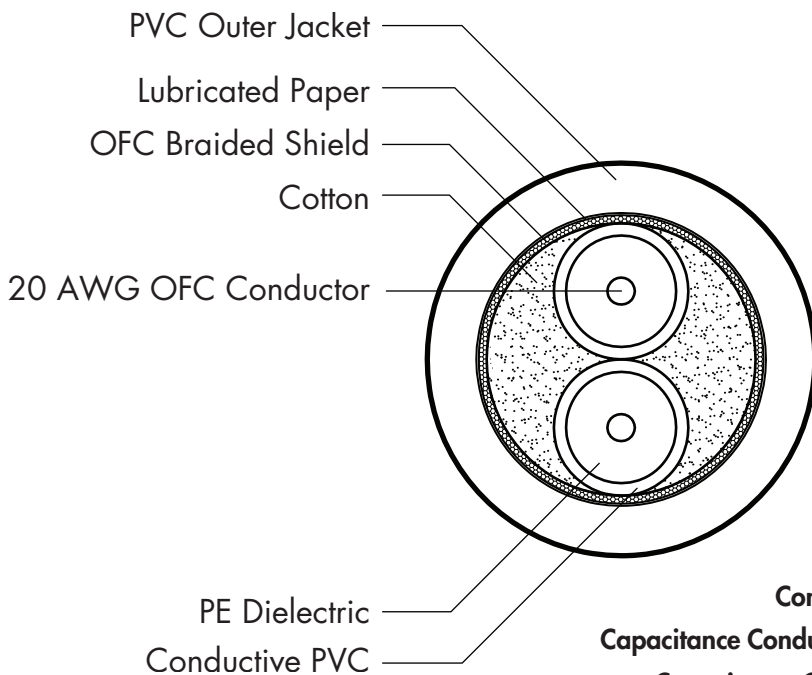

Specifications

Series	CMK-000AU
Lengths	5, 10, 15, 20, 25, 30, 50, 75, 100 ft
Connector 1	Neutrik XLR3F
Connector 2	Neutrik XLR3M
Conductors	20 AWG x 2 OFC
Conductor Strands	26/0.16 mm
Insulation 1	1.5 mm Ø PE
Insulation 2	1.8 mm Ø Conductive PVC
Shield	95% OFC Braided
Jacket	6.8 mm Ø PVC

Characteristics

Conductor Resistance	0.0387, 0.0387 ohms/m at 20° C
Capacitance Conductor to Conductor	109.53 pF/m at 1 kHz
Capacitance Conductor to Braid	243.87, 242.38 pF/m at 1 kHz
Inductance Conductor to Conductor	0.6089 uH/m at 1 kHz
Inductance Conductor to Braid	0.2156, 0.2245 uH/m at 1 kHz

